


# MAXWELL PRODUCTS

## GAP | PATCH 330

### DATA SHEET

MAXWELL PRODUCTS, INC.  
SALT LAKE CITY, UT  
800.266.2090

GAP-Patch 330 is a robust, hot-applied, permanent repair for potholes in highways and municipal streets and for bridge joints. Able to be applied in winter weather under imperfect conditions, it is ideally suited for concrete and asphalt pavement repairs of at least two inches deep and between one half square foot and 10 square feet in area. Patch material is hot-applied and formulated with flexible, polymer-modified asphalt (designed to accommodate ground movement) and durable, engineered aggregates (capable of bearing heavy loads and traffic).

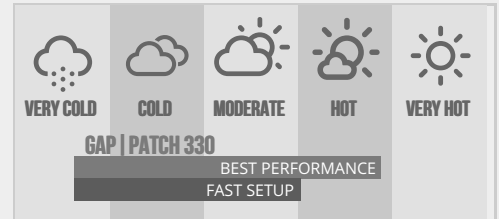

### SPECIFICATION

#### BINDER

##### TEST METHOD:

CONE PENETRATION : 77°F (25°C), 150G, 5S : ASTM D5329

SOFTENING POINT : ASTM D36

FLEXIBILITY : 1 IN (25MM) MANDREL, 90 DEG BEND, 2S : ASTM D3111

ASPHALT COMPATIBILITY : 140°F (60°C), 72 HR : ASTM D5329

##### RESULT:

70 DMM MAX

200°F (93°C) MIN

PASS -15°F (-26°C)

PASS

#### AGGREGATE

##### TEST METHOD:

AGGREGATE PREPARATION

SIEVE ANALYSIS : 3/4" SIEVE, PASSING : MANUFACTURER'S CERTIFICATION

SIEVE ANALYSIS : NO. 4 SIEVE, PASSING : MANUFACTURER'S CERTIFICATION

SIEVE ANALYSIS : NO. 16 SIEVE, PASSING : MANUFACTURER'S CERTIFICATION

FRACTURED FACE : 2 OR MORE FACES : MANUFACTURER'S CERTIFICATION

##### RESULT:

WASHED, CLEAN & DRIED

95% MIN

15% MAX

3% MAX

85% MIN

### APPLICATION INSTRUCTIONS

Read and follow application instructions before use. This product must be indirectly heated using a oil jacketed kettle. Material must be constantly agitated to keep aggregate evenly suspended. Remove standing water and debris from the pothole and reduce moisture content in the top 2 inches of the repair to 12% or less. Maximum safe heating temperature: 390°F (204°C). Recommended application temperature: 320°F (193°C).

### WARRANTY

Maxwell Products, Inc. warrants that our products will be free from defects in material or workmanship and will conform to our published specifications at the time of shipment. Due to the many differing procedures used in preparing and installing materials, and differing surfaces on which our products may be applied, Maxwell Products assumes no liability for the failure of our products due to improper surface preparation, surface composition, installation, equipment failure or operator errors. In the event our products fail to conform to our published specifications at the time of shipment, we will, at our expense and sole option, replace our defective product or give you a full or partial refund of the purchase price from Maxwell Products. Claims must be made within three (3) months of the date of purchase. MAXWELL PRODUCTS HEREBY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Generated May 25, 2024.

Please visit <http://maxwellproducts.com> for the current version of this document.