

ELASTO FLEX CA TYPE 3

JOINT AND CRACK SEALANT, FOR ASPHALT AND CONCRETE PAVEMENTS




Elastoflex CA Type 3 is a hot applied, polymer modified asphalt crack sealant. This product applies and sets up best in up to moderate temperatures, and is highly durable in cold to hot climates. Elastoflex CA Type 3 is self leveling and fast setting. Formulated with a medium viscosity for all-round ease of application, it is ideal for highways, county roads, municipal streets and airports. Elastoflex CA Type 3 delivers high performance at a moderate cost.

SPECIFICATION

| | |
|---|------------------------------|
| CONE PENETRATION : 77°F (25°C) : ASTM D 5329 | 50 dmm max |
| SOFTENING POINT : ASTM D 36 | 194°F (90°C) min |
| FLEXIBILITY : 1/4 in (6.4mm) mandrel, 180 deg bend, 2s : ASTM D 3111 | Pass 32°F (0°C) |
| TENSILE ADHESION : 77°F (25°C) : ASTM D 5329 | 400% min |
| RESILIENCE : 77°F (25°C) : ASTM D 5329 | 30-70% |
| DENSITY : 77°F (25°C) : ASTM D 70 | 10.43 lb/gal (1.25 g/mL) max |
| ASPHALT COMPATIBILITY : 140°F (60°C) 72 hr : ASTM D 5329 | Pass |

Applicable Specs

Caltrans Type 3

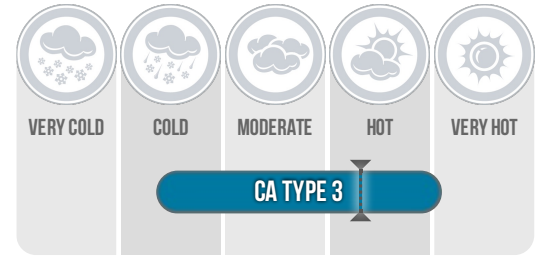

- Performance Range
- ⏸ Suggested Max. Application Temp

Available in:



Salt Lake City, UT
Toll Free - 800.266.2090
Fax - 800.266.2090

APPLICATION

Read and follow application instructions before use. This product must be heated using indirect heating methods, either a double boiler or hot oil circulating kettle. Equipment must have means of maintaining constant agitation to the material. Maximum safe heating temperature: 400°F (204°C). Recommended application temperature: 380°F (193°C).

WARRANTY

Warranty: Maxwell Products, Inc. warrants that our products meet the applicable specifications at the time of shipment. Due to the many differing procedures used in preparing and installing materials, Maxwell Products assumes no liability for material failure due to improper installation, equipment failure or operator errors. Any remedies are limited, at Maxwell Products' option, to replacement of materials or refund (full or partial) of the purchase price from Maxwell Products. Claims must be made within three (3) months of the date of purchase. There is no other warranty either expressed or implied.

Generated February 19, 2014.

Please visit <http://maxwellproducts.com> for an updated version.