Nuvo® PL

MAXWELL PRODUCTS

PREMIUM CRACK SEALANT FOR EVERY JOB

Nuvo PL is our premium hot-pour crack sealant, engineered for high-demand pavement: parking lots, roadways and everything between. It sets up quickly to resist tracking and is formulated to stand up to turning tires, stop-and-go traffic and heavy loads.

With inteliBond™ technology, strong adhesion and deep crack penetration, Nuvo PL provides a flexible seal that holds through wide temperature swings and thermal pavement movement.





INCREASED DURABILITY

Designed for high-demand areas, holding up to turning tires, heavy traffic, and tough jobsite conditions.

FASTER SETUP

Rapid set formula is typically ready for traffic within 15 minutes of application.


DIRECT FIRE COMPATIBLE


Compatible with oil-jacketed and direct-fire melters for dependable performance in a wide range of equipment.

GOOD CHEMISTRY

InteliBond technology is the result of over 50 years of advanced polymer chemistry.
A proprietary blend of polymers, it supports active bonding with pavement and long-term performance where water and movement challenge the bond.
InteliBond is just a simple word for some very complex chemistry.

inteliBond™ TECHNOLOGY

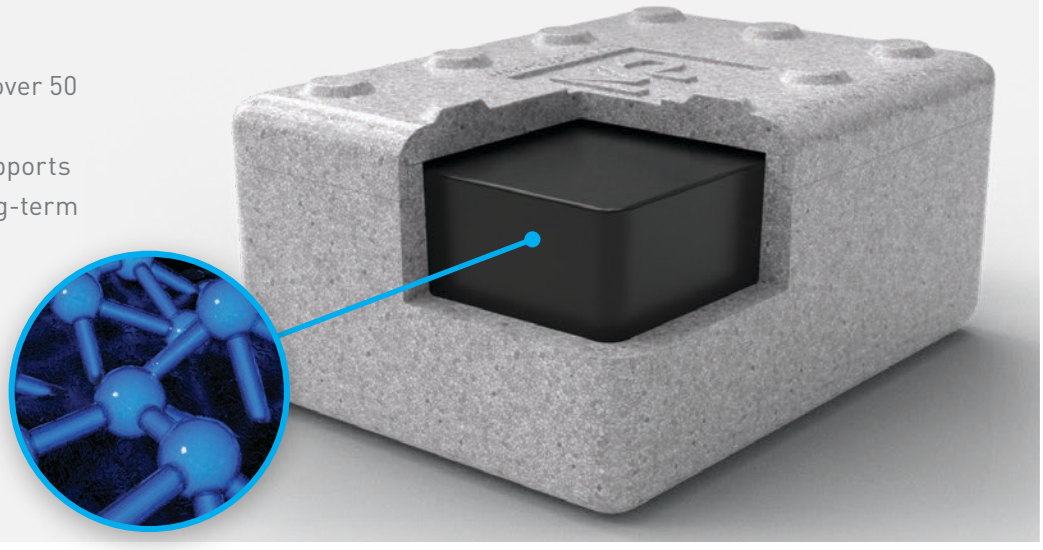

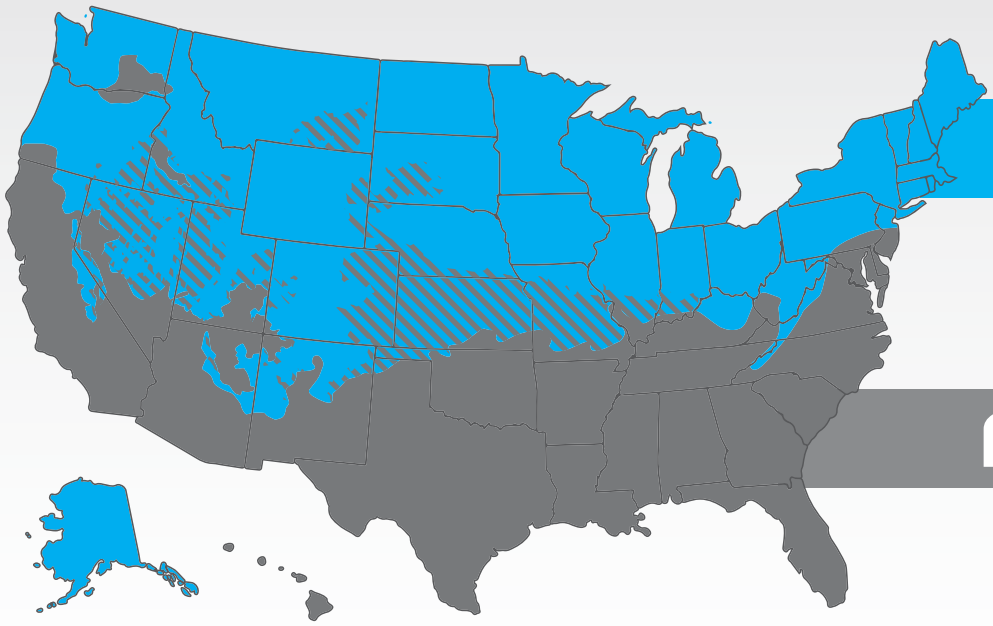

COLD TO MODERATE CLIMATES

nuvo® PL 1

FLEXIBLE TO **-20°F**

QUICK-SET UP TO **100°F**

MODERATE TO HOT CLIMATES

nuvo® PL 2

FLEXIBLE TO **0°F**

QUICK-SET UP TO **110°F**

Two formulas cover most climates. Where both cover a site, choose the priority: PL 1 for more cold-weather flexibility or PL 2 for faster setup and more firmness in the heat.

IDEAL FOR USE IN MOST TYPES AND BRANDS OF CRACK SEAL MELTERS:

☑ DIRECT FIRE ☑ OIL JACKETED ☑ ALL MAJOR MANUFACTURERS



THINKING OUTSIDE THE BOX RESULTED IN REINVENTING IT.

(twice)

ZIP BOX

Our convenient, patented ZipBox makes working with sealants (and cardboard), faster, safer, and easier. Tapeless closure and easy-open perforated design eliminate box cutters and increase job site safety.

PolySkin

Meltable Packaging

PolySkin is our fully meltable container designed to go straight from pallet to melter with no opening or disposal. Its structural, interlocking design improves pallet stability and helps resist sagging in storage. It melts quickly and cleanly avoiding the mess and clogs common with plastic liners or bagged packaging.